



Integration **F-ISU130**

# UNIVERSAL ISU130

Product Data Sheet

## 2-way component kit



Butyl suspension  
**Excellent reliability**

Divisible ears  
**Installation in various locations**

Phase plug  
**Improved sound dispersion**

Polyglass cone  
**Natural sound without coloration**

Aluminum/Magnesium inverted dome tweeter  
**Clear and detailed sound**

Acoustic horn  
**Improves the position of the soundstage**

Connector with integrated crossover (woofer + tweeter)  
**Easy to install**

### ADVANTAGES

- High sensitivity
- Shallow mounting depth (1<sup>59</sup>/<sub>64</sub>" - 48.9mm)
- Dynamics and neutrality
- 2 types of tweeter mounts
- Compact tweeter



Detachable tweeter



Tilted mounting frame:  
Easy to install



Mounting options:  
car and display

## TECHNICAL CHARACTERISTICS

**Woofer:** 5" (130mm)  
**Voice coil diameter:** 1" (25mm)  
**Max. power:** 120W  
**Nom. power:** 60W RMS

**Sensitivity (2.83V/1m):** 91.8dB  
**Frequency response:** 90Hz-21kHz  
**Al/Mg inverted dome tweeter**  
**Accessories:** delivered without grilles


**Integrated crossover:** 6dB/oct



# UNIVERSAL ISU165

Product Data Sheet

## 2-way component kit

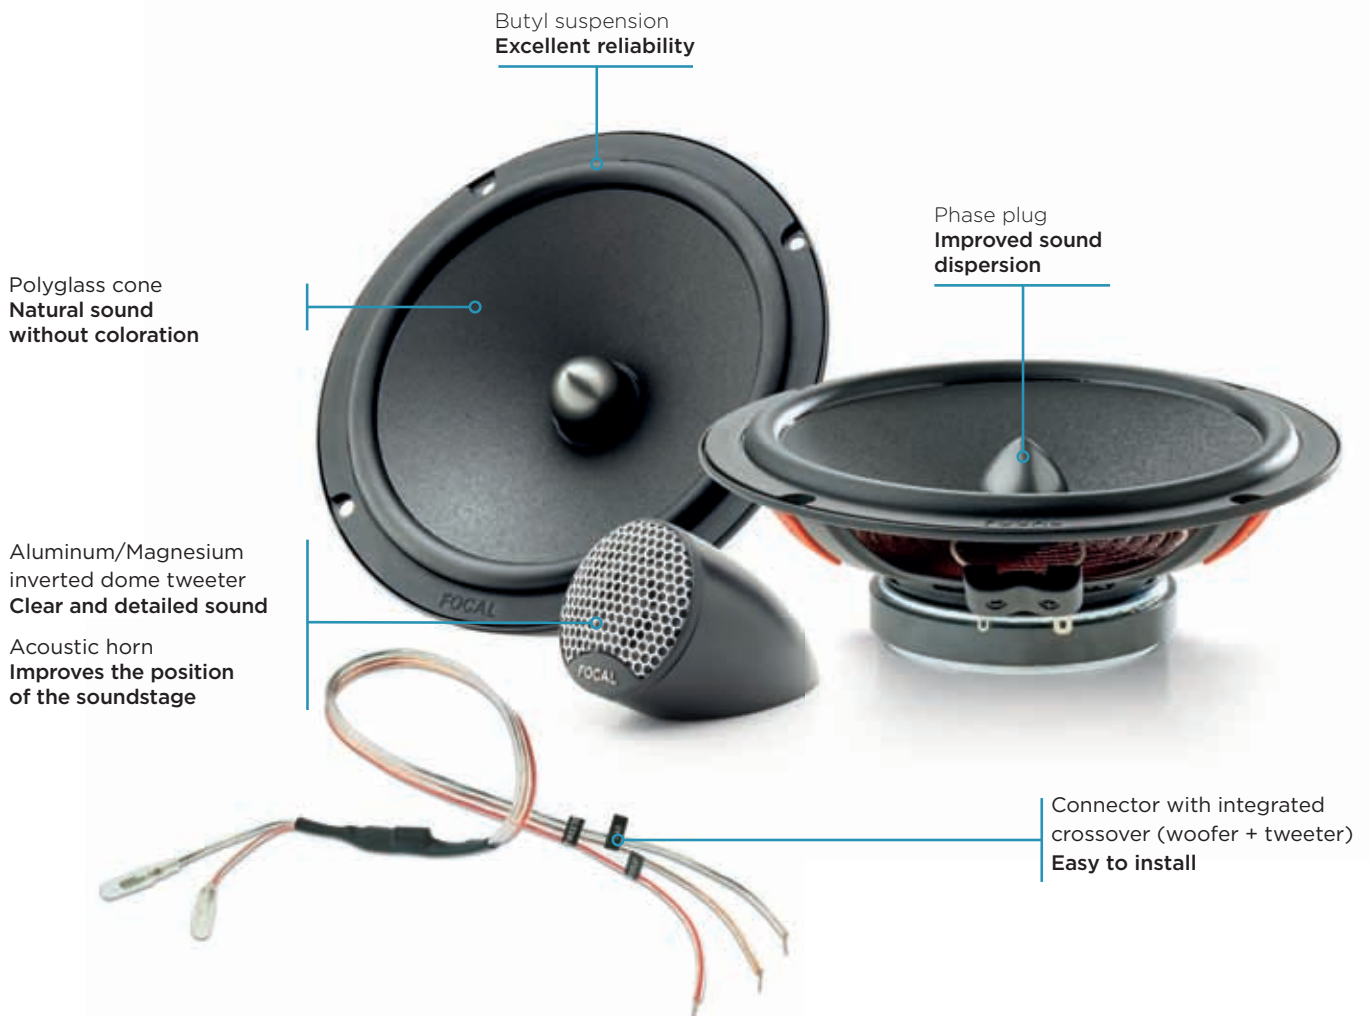

### ADVANTAGES

- High sensitivity
- Shallow mounting depth (1<sup>29/32</sup>" - 48.4mm)
- Dynamics and neutrality
- 2 types of tweeter mounts
- Compact tweeter



Detachable tweeter



Tilted mounting frame:  
Easy to install



Mounting options:  
car and display

## TECHNICAL CHARACTERISTICS

**Woofer:** 6<sup>1/2</sup>" (165mm)  
**Voice coil diameter:** 1" (25mm)  
**Max. power:** 140W  
**Nom. power:** 70W RMS

**Sensitivity (2.83V/1m):** 93dB  
**Frequency response:** 60Hz-21kHz  
**Al/Mg inverted dome tweeter**  
**Accessories:** delivered without grilles

**Integrated crossover:** 6dB/oct



# UNIVERSAL ISU200

Product Data Sheet

## 2-way component kit



Butyl suspension  
Excellent reliability

Polyglass cone  
Natural sound  
without coloration

Aluminum/Magnesium  
inverted dome tweeter  
Clear and detailed sound

Acoustic horn  
Improves the position  
of the soundstage

Connector with integrated  
crossover (woofer + tweeter)  
Easy to install

### ADVANTAGES

- High sensitivity
- Shallow mounting depth (2 1/2" - 63.5mm)
- Dynamics and neutrality
- Deep bass
- 2 types of tweeter mounts
- Compact tweeter



Detachable tweeter



Tilted mounting frame:  
Easy to install



Mounting options:  
car and display

## TECHNICAL CHARACTERISTICS

**Woofer:** 8" (200mm)  
**Voice coil diameter:** 1" (25mm)  
**Max. power:** 160W  
**Nom. power:** 80W RMS

**Sensitivity (2.83V/1m):** 93dB  
**Frequency response:** 40Hz-21kHz  
**Al/Mg inverted dome tweeter**  
**Accessories:** delivered without grilles


**Integrated cro**



# UNIVERSAL ISU690

Product Data Sheet

## 2-way component kit

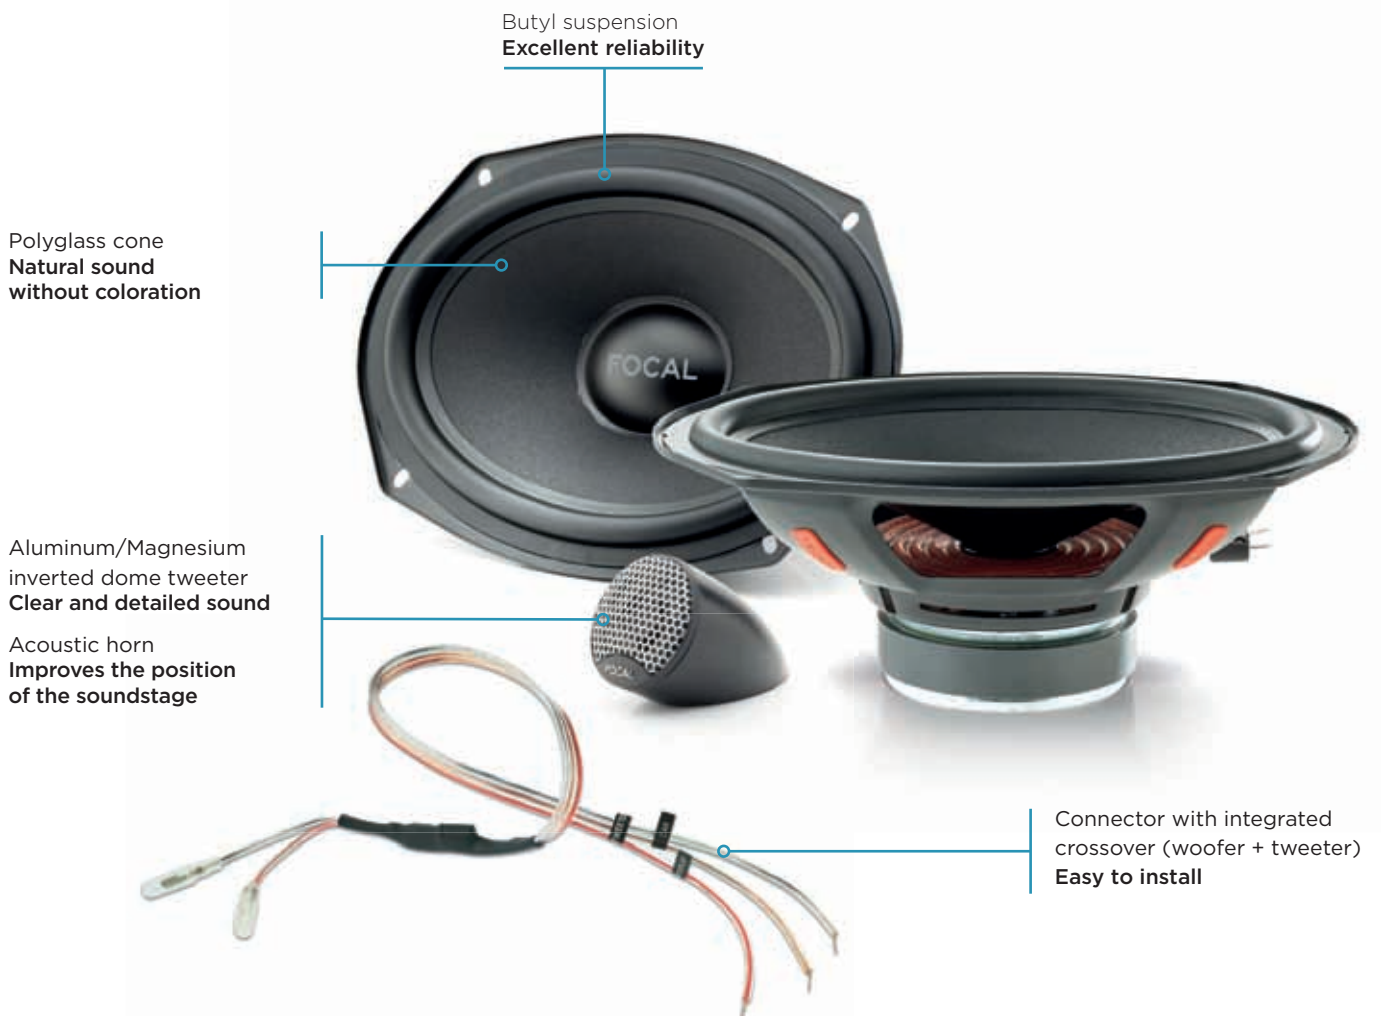

### ADVANTAGES

- High sensitivity
- Shallow mounting depth (3<sup>9</sup>/<sub>32</sub>" - 83.5mm)
- Dynamics and neutrality
- 2 types of tweeter mounts
- Compact tweeter



Detachable tweeter



Tilted mounting frame:  
Easy to install



Mounting options:  
car and display

## TECHNICAL CHARACTERISTICS

**Woofer:** 6"x9" (164x235mm)  
**Voice coil diameter:** 1" (25mm)  
**Max. power:** 160W  
**Nom. power:** 80W RMS

**Sensitivity (2.83V/1m):** 93.6dB  
**Frequency response:** 55Hz-21kHz  
**Al/Mg inverted dome tweeter**  
**Accessories:** delivered without grilles

**Integrated crossover:** 6dB/oct